

कुमाऊँ विश्वविद्यालय, नैनीताल


पत्रांक-केयू/वि०नियो०/2024/826

दिनांक- 23-07-2024

निविदा सूचना

अधोलिखित लघु निर्माण/मरम्मत कार्यों के लिए विश्वविद्यालय में पंजीकृत ठेकेदारों से दिनांक 07.08.2024 समय अपराह्न 2:00 बजे तक दस्ती/डाक/कोरियर द्वारा निविदा आमंत्रित किये जाते हैं, जो उसी दिन अपराह्न 3:00 बजे विश्वविद्यालय कार्यालय में खोले जायेंगे। कार्य आदि के विवरण की जानकारी विश्वविद्यालय के तकनीकी अनुभाग से किसी भी कार्य दिवस को प्रातः 10:00 बजे से सांय 5:00 बजे तक प्राप्त की जा सकती है। निविदा खोलने की तिथि में अवकाश होने पर निविदा अगले कार्य दिवस में खोली जायेंगी। किसी एक अथवा समस्त निविदाओं को स्वीकृत/अस्वीकृत करने का अधिकार अधोहस्ताक्षरी के पास सुरक्षित होगा।

क्र०सं०	कार्य का नाम	अनुमानित लागत	धरोहर राशि	निविदा फार्म मूल्य	कार्य पूर्ण करने का समय
1	डी०एस०बी० परिसर कर्मचारी आवास में अनुरक्षण कार्य।	रु० 3.03 लाख	रु० 6,100.00	रु० 500.00 +90 (जी०एस०टी०)	45 दिन

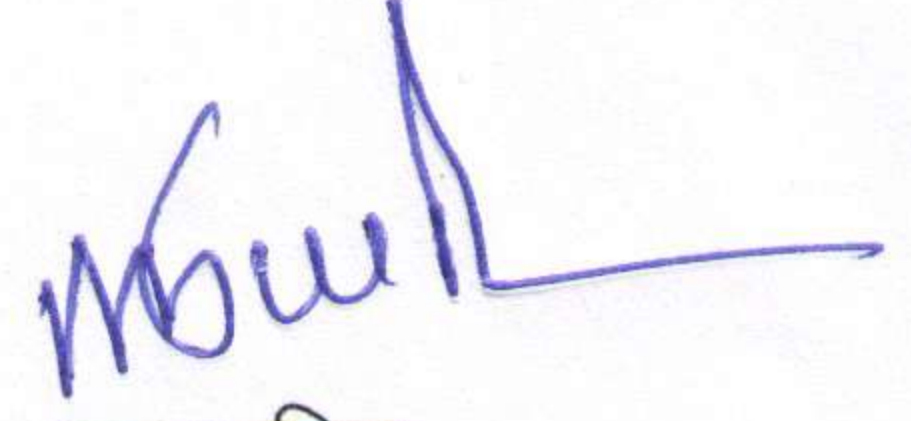

कुलसचिव


कुमाऊँ विश्वविद्यालय, नैनीताल

प्रतिलिपि- सूचनार्थ एवं वृहद प्रचारार्थ एवं आवश्यक कार्यवाही हेतु प्रेषित -

1-ई०आर०पी० सेन्टर/विश्वविद्यालय कम्प्यूटर प्रोग्रामर को उक्त सूचना विश्वविद्यालय वेबसाइट में अपलोड करने हेतु।

2-विश्वविद्यालय में पंजीकृत ठेकेदारों को ई-मेल से सूचनार्थ।

3-सूचना पट्ट, प्रशासनिक भवन, कु०वि०वि०, नैनीताल।

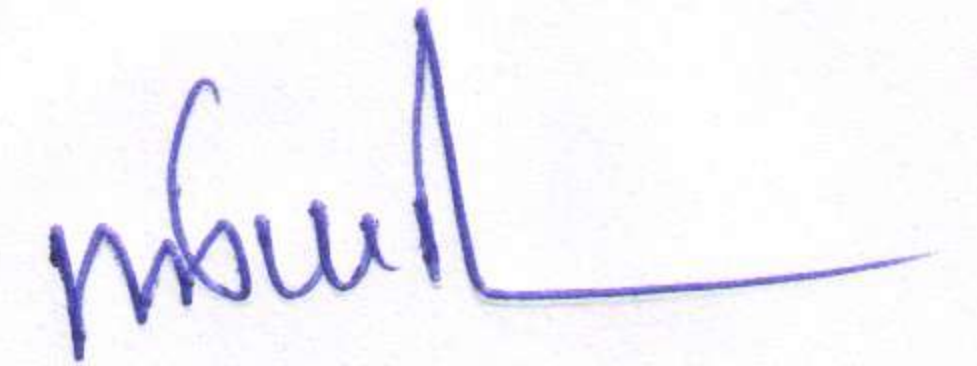


कुलसचिव

कुमाऊँ विश्वविद्यालय, नैनीताल

कुमाऊँ विश्वविद्यालय, नैनीताल

निविदा पत्र

1. निविदा प्रपत्र सीलबन्द लिफाफे में अधोहस्ताक्षरी के कार्यालय में निर्धारित तिथि एवं समय तक दस्ती/डाक/कोरियर/निविदा बाक्स में डाली जानी आवश्यक होगी।
2. प्रत्येक निविदा के साथ रू0 100.00 का नॉन ज्यूडिशियल स्टाम्प पर एक रूपये का हस्ताक्षरयुक्त रसीद टिकट संलग्न होना चाहिए।
3. प्रत्येक निविदा के साथ निर्धारित शुल्क विश्वविद्यालय कैश काउन्टर की रसीद के रूप में संलग्न हो एवं निविदा के साथ धरोहर राशि एफ0डी0आर0/एन0एस0सी0 के रूप में वित्त नियन्त्रक, कुमाँऊ विश्वविद्यालय के पक्ष में बन्धक होनी चाहिए।
4. निविदाता को चाहिए कि वे निविदा लेने से पूर्व कार्यस्थल का निरीक्षण कर लें।
5. समस्त कार्य लोक निर्माण विभाग (डी0एस0आर0) द्वारा समय-समय पर निर्गत निर्धारित मानकों/शर्तों के अनुरूप सम्पादित किये जायेंगे।
6. किसी एक अथवा समस्त निविदाओं को स्वीकृत/अस्वीकृत करने का अधिकार अधोहस्ताक्षरी के पास सुरक्षित होगा।

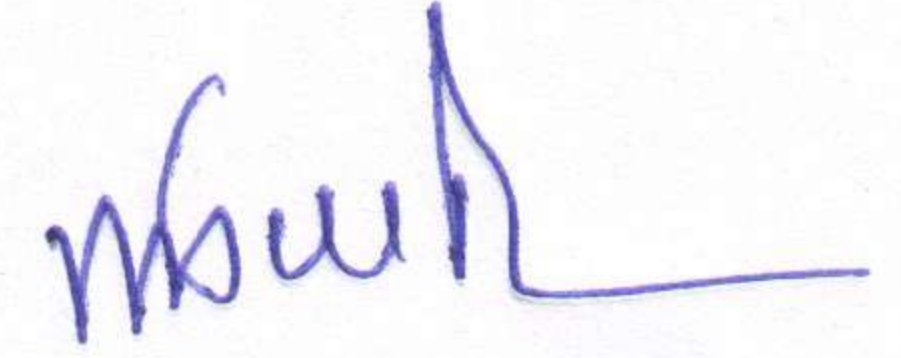

कुलसचिव

कुमाँऊ विश्वविद्यालय, नैनीताल



Kumoan University Nainital

Tender form

Name of work- Repair & maintenance work at D.S.B. campus staff Qtr. K.U. Nainital.

Date of Calling tender 23-07-2024

Cost of tender form- Rs. 590.00

Time of completion- 45 Days

Date of opening tender 07-08-2024


Earnest money -Rs. 6,100.00

Validity of tender- 45 Days

S. N.	Item of work	Quantity	Unit	Estimated Rate in Rs
1	R.C.C. work in beam, floor, roofing lintels etc. up to floor five level with 1:1.5:3 (cement sand and stone aggregate 20mm) 5.3	0.62	Cum	11,505.70
2	Steel rein. For R.C.C. work including straight., cutting, bending , placing in position complete.5.22.1	48.67	Kg	107.10
3	Steel work in built up tubular trusses etc. including cutting hosting fixing in position including welding and bolted hot finished welded tubes complete. 1.16.1	305.24	Kg	194.40
4	Providing C.G.I. sheet roofing complete fixed with polymer coated J or L hooks bolt and nut 8 mm., 0.63 mm thick Zinc coating not less then 275 Kg per m ² 12.1.3	9.90	Sqm	1087.65
5	Brick work with 1:6 cement mortar in super structure.	1.52	Cum	9105.95
6	12 mm thick plaster with 1:6 cement and fine sand mortar 13.1.2	26.40	Sqm	333.35
7	Oil bond distemper two coat paint over one coat primer with approved quality 13.41.2	143.78	Sqm	185.65
8	P/F I.S.I. marked flush door shutter conf. I.S. 2202 non decorative type 35 mm thick including complete all.9.21.1	4.90	Sqm	2392.65
9	C.C. flooring 1:2:4 cement sand and aggregate 20 mm, 40 mm thick with neat finish 11.3	2.10	Sqm	927.25
10	P/F plaster pressed three layer particle board medium density 12 mm thick complete with screw etc. 9.17.1	7.94	Sqm	802.95
11	P/F plaster pressed three layer particle board medium density 18 mm thick complete with screw etc. 9.17.2	15.20	Sqm	1020.95
12	Synthetic enamel paint two coat with one coat primer approved quality complete. 13.62.1	98.82	Sqm	226.25
13	P/F glazed shutters window fixing with hinges screw etc. klin seasoned selected planks of 35 mm thick sheesham wood 5.3.1	12.52	Sqm	3338.35
14	P/F wire gazed shutter using g.i. ms wire for widow klin seasoned 30 mm thick sheesham wood . 9.27.2.1.3	12.52ds	Sqm	3918.15
15	P/F wood work in frame of door window etc. with klin seasoned and chemically treated hillock wood 9.1.3	0.16	Cum	83378.05
16	Steel work welded in built up section/ frame work cutting hoisting fixing in position in frame work gates etc. 10.25.2	52.05	Kg	172.60

Note- All the work shall be carried out as per P.W.D.(D.S.R.) specification and directed by Engineer Incharge I/We tender.....% below/above on the given Estimated rates.

Sig. of contractor
(with full address)

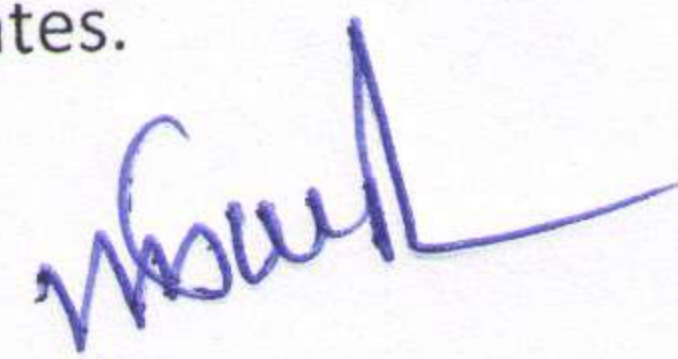
Registrar
